









### CX 90 - 110



## MC 105 - 130





Completely integrated system




Lower links fold inward diagonally



- Robust and sophisticated design conceived for the heaviest of accessory equipment and long operating hours
- Optimally adapted and designed to integrate with your McCORMICK – tractor
- O Highly stable due to frame up to clutch housing
- Steering angle and ground clearance completely maintained
- Lower links standardly equiped with Walterscheid link hooks
- Stable and warp resistant lifting frame lower links are serially foldable up (without tools) and removable
- Enhanced float adapter for the best ground adjustment of your front equipment – can be locked without tools
- All bearings and pivots can be greased
- Cylinders with hardened and hard-chrome plated piston rods
- Standard shunt coupling and spindle top link
- Simple, quick assembly!



Absolute ground clearance!

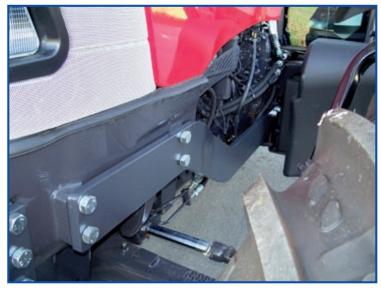

Stable frame up to clutch housing – Uninhibited front axle oscillation

### **Front PTO:**

- Completely in your tractor integrated unit
- Designed for the heaviest of long-term loads transfer of full motor power is easily possible!
- Hydraulic front PTO clutch for a smooth and gentle start-up of your front-end implements
- Switch –on and –off by a push-button
- PTO shaft can be manually turned for easy coupling
- Simple, quick assembly front PTO can also be retrofitted without any problems



Front linkage and PTO are a compact unit

#### Accessories:

- O Quick coupling triangle cat. 2 with upper role
- front linkage remote control (only with electr. control unit)
- Hydraulic accumulator
- Multivalve: double acting single acting locked (transport protection)
- Brackets for mower relief springs
- Additional hydraulic connections in front
- Ballastweights and supporting frames for basic weight of the tractor
- O further option range for municipal use



Switch - on by a push-button



Holder for top link - standard for all types



Brackets for mower relief springs



# XTX 145 - 165 / TTX 190 - 230





Available for all series – also for tractors of the F-series!



Optimally co-ordinated also for the combination Front linkage + Front loader!





All information and illustrations herein are approximate and not binding. Subject to modifications!

Technical Data:	CX 70L – 85L	C 70 max - 105 max	CX 90 – 110	MC 105 – 130	MC 120 – 135 P6	XTX / TTX 145 – 230	F 65 – 105 F/GE/XL
Front linkage category	Cat. 2	Cat. 2	Cat. 2	Cat. 2	Cat. 2	Cat. 2	Cat. 1
Lifting force at link hook	23 kN	27 kN	27 kN	27 kN	40 kN	40 kN	15 kN
Double acting lifting cylinders	on request	on request	on request	on request	standard	standard	on request
Lower link hooks	Walterscheid Cat. 2	Walterscheid Cat. 2	Walterscheid Cat. 2	Walterscheid Cat. 2	Walterscheid Cat. 3L	Walterscheid Cat. 3L	Walterscheid Cat. 1
PTO shaft speed	1000 rpm.						
Direction of rotation	clockwise in driving direction						
PTO shaft profile	DIN 9611-1 3/8"						

#### **Contact Walterscheid Australia:**

17-31 Discovery Road, Dandenong South, Victoria 3175 | Phone: (03) 9580 7300 Fax: (03) 9580 0379

10a Duncan Street, Montrose, Tasmania 7010 | Phone: (03) 6272 2255 Fax: (03) 6272 0671

12a Pradella Street, Darra, Queensland 4076 | Phone: (07) 3117 2850 Fax: (07) 3117 2851

43 Margaret Vella Drive, Mackay, Queensland 4740 | Phone: (07) 4914 2150 Fax: (07) 4914 2199

602 Ingham Road, Bohle, Queensland 4818 | Phone: (07) 4795 3450 Fax: (07) 4795 3499

2 Canavan Drive, Beresfield, New South Wales 2322 | Phone: (02) 7909 5150 Fax: (02) 7909 5195

13 Glastonbury Avenue, Unanderra, New South Wales 2526 | **Phone**: (02) 4229 2381 **Fax**: (02) 4226 3016 Unit 2, 479 - 481 South Road, Regency Park, South Australia | **Phone**: (08) 7088 8980 **Fax**: (08) 8349 5264

49 Banksia Road, Welshpool, Western Australia 6106 | **Phone:** (08) 6189 8050 **Fax:** (08) 9258 6311

10 Shanahan Road, Bunbury, Western Australia 6230 | Phone: (08) 9725 7033 Fax: (08) 9725 7044

Website: www.walterscheid.com.au | Email: walterscheid@walterscheid.com.au