

Series	D	L	Part Number
Type	D x Spline	mm	
2100	1	25mm x 6	10.11.100
	1	38mm x 8	10.34.110
	1	1 1/8" x 6	10.11.00
	1	1 3/8" x 6	10.10.00
	1	1 3/8" x 21	10.50.00
	1	1 3/4" x 6	10.39.101
2200	1	1 1/8" Hex	20.10.141
	1	25mm x 6	20.27.116
	1	1 1/8" x 6	20.27.00
	1	1 3/8" x 6	20.10.00
	1	1 3/8" x 21	20.18.00
	1	1 3/4" x 6	20.11.101
	1	1 3/4" x 20	20.11.118
	2. 80°	1 3/8" x 6	20.10.810
	2. 80°	1 3/8" x 21	20.40.810
2300	1	1 1/8" Hex	21.10.129
	1	38mm x 8	21.18.124
	1	1 1/8" x 6	21.17.00
	1	1 3/8" x 6	21.10.00
	1§	1 3/8" x 6	21.10.142
	1	1 3/8" x 6 (Fahr)	21.40.100
	1	1 3/8" x 21	21.19.00
	1	1 3/4" x 6	21.18.00
	1	1 3/4" x 20	21.18.14
	2. 80°	1 3/8" x 6	21.10.810
	2. 80°	1 3/4" x 20	21.18.816


QUICK RELEASE PIN SETS			
Series	Description	Dia	Part Number
2100 - 2600		mm	
	1 1/8" & 1 3/8" Yokes	14.8	Agraset 101
	1 3/4" Yokes	18.0	Agraset 102

Series	D	L	Part Number
Type	D x Spline	mm	
2400	1	1 1/8" Hex	35.10.140
	1	38mm x 8	35.10.108
	1	1 3/8" x 6	35.10.00
	1	1 3/8" x 6	35.10.142
	1	1 3/8" x 21	35.10.02
	1§	1 3/8" x 21	35.79.101
	1§	1 3/8" x 21	35.79.106
	1§	1 3/8" x 21	35.79.102
	1	1 3/4" x 6	35.18.00
	1	1 3/4" x 20	35.18.02
	1§	1 1/2" x 23	35.79.112
	2. 80°	1 3/8" x 6	35.10.10
	2. 80°	1 3/8" x 21	35.10.12
	2. 80°	1 3/4" x 6	35.18.10
	2. 80°	1 3/4" x 20	35.18.12
2500	1	1 1/8" Hex	36.10.120
	1	1 1/4" Sq	36.18.1250SQ
	1	1 1/2" Hex	36.18.135
	1	1 3/8" x 6	36.10.00
	1^	1 3/8" x 6	36.30.102
	1	1 3/8" x 21	36.10.02
	1§	1 3/8" x 21	36.10.129
	1§	1 1/2" x 23	36.10.131
	1	1 3/4" x 6	36.18.00
	1^	1 3/4" x 6	36.18.141
	1^	1 3/4" x 6	36.30.100
	1	1 3/4" x 20	36.18.02
	1^□	1 3/4" 20	36.30.110
	1§	1 3/4" x 20	36.18.170
	2. 80°	1 3/8" x 6	36.10.10
	3. P80°	1 3/8" x 6	36.10.310
	2. 80°	1 3/8" x 21	36.10.12
	2. 80°	1 3/4" x 6	36.18.10
	2. 80°	1 3/4" x 20	36.18.12
2600	1	1 3/8" x 6	26.10.00
	1	1 3/8" x 21	26.10.02
	1^	1 3/8" x 21	26.10.102
	1	1 3/4" x 6	26.18.00
	1	1 3/4" x 20	26.18.02

§ Short Ear Yoke

^ Rotating Bend Angle 70°

□ Master Spline

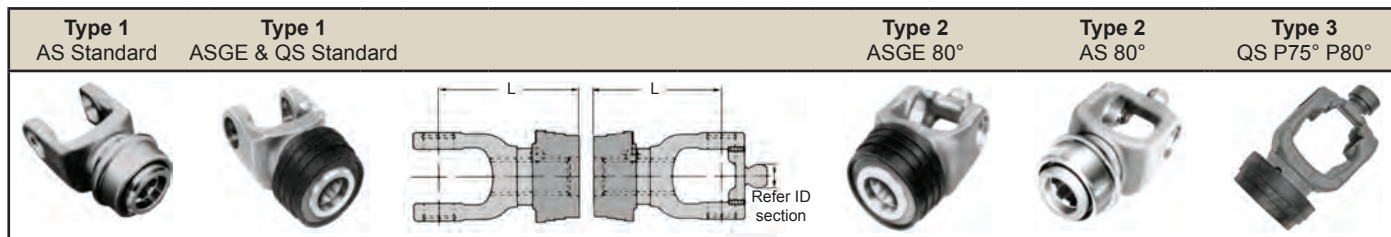

Series	Type	D D x Spline	L mm	Part Number
2100	1.AS	25mm x 10	76	10.80.100
	1.AS	1" x 15	76	10.80.00
	1.ASGE	1 3/8" x 6	96	10.83.30
	1.ASGE	1 3/8" x 21	96	10.83.32
2200	1.AS	1" x 15	98	20.82.106
	1.ASGE	1 3/8" x 6	98	20.83.30
	1.ASGE	1 3/8" x 21	98	20.83.32
	2.ASGE 80°	1 3/8" x 6	98	20.83.830
	2.ASGE 80°	1 3/8" x 21	98	20.83.832
2300	1.ASGE	1 3/8" x 6	107	21.83.30
	1.ASGE	1 3/8" x 21	107	21.83.32
	1.QS	1 3/4" x 6	125	21.84.00
	1.QS	1 3/4" x 20	125	21.84.02
	2.ASGE 80°	1 3/8" x 6	107	21.83.830
	2.ASGE 80°	1 3/8" x 21	107	21.83.832
	2.QS 80°	1 3/4" x 6	125	21.84.810
	2.QS 80°	1 3/4" x 20	125	21.84.812
2400	1.ASGE	1 3/8" x 6	112	35.83.30
	1.ASGE	1 3/8" x 21	124	35.83.32
	1.QS	1 3/4" x 6	126	35.84.00
	1.AS	1 3/4" x 20	126	35.84.102
	2.ASGE 80°	1 3/8" x 6	118	35.83.830
	2.ASGE 80°	1 3/8" x 21	126	35.83.832
	2.QS 80°	1 3/4" x 6	132	35.84.10
	2.AS 80°	1 3/4" x 20	132	35.84.112
	3.QS P80°	1 3/8" x 6 (H)	132	35.83.310
	3.QS P80°	1 3/8" x 21(H)	126	35.83.312
	3.QS P80°	1 3/4" x 6	132	35.84.310
	3.QS P80°	1 3/4" x 20 (H)	132	35.84.312
	3.AS P80°	1 3/4" x 6	132	35.84.314
	3.AS P80°	1 3/4" x 20	132	35.84.316

Series	Type	D D x Spline	L mm	Part Number
2500	1.AS	1 3/8" x 6	133	36.83.100
	1.AS	1 3/8" x 21	133	36.83.102
	1.AS	1 3/4" x 6	133	36.84.100
	1.AS	1 3/4" x 20	133	36.84.102
	2.AS 80°	1 3/8" x 6	139	36.83.110
	2.AS 80°	1 3/8" x 6 (H)	139	36.83.130
	2.AS 80°	1 3/8" x 21	139	36.83.112
	2.AS 80°	1 3/8" x 21 (H)	139	36.83.132
	2.QS 80°	1 3/4" x 6	133	36.84.10
	2.AS 80°	1 3/4" x 20	139	36.84.112
	3.QS P80°	1 3/8" x 6 (H)	139	36.83.318
	3.QS P80°	1 3/8" x 21 (H)	139	36.83.320
	3.QS P80°	1 3/4" x 6	139	36.84.310
	3.QS P80°	1 3/4" x 20 (H)	139	36.84.320
	3.AS P80°	1 3/8" x 6	139	36.83.310
	3.AS P80°	1 3/8" x 21	139	36.83.312
	3.AS P80°	1 3/4" x 6	139	36.84.314
	3.AS P80°	1 3/4" x 20	139	36.84.316
2600	1.AS	1 3/8" x 6	146	26.84.100
	1.AS	1 3/8" x 21	146	26.84.102
	1.AS	1 3/4" x 6	146	26.84.104
	1.AS	1 3/4" x 20	146	26.84.106
	3.QS P75°	1 3/8" x 6H	152	26.84.62
	3.QS P75°	1 3/8" x 21H	152	26.84.63
	3.QS P75°	1 3/4" x 6H	152	26.84.61
	3.QS P75°	1 3/4" x 20H	152	26.84.60
P700	1.QS	1 3/4" x 6	165	27.84.04
	1.QS	1 3/4" x 20	165	27.84.06


H Hardened

LOCKING COLLAR SETS

Diagram	Description	Part Number
Q S Yokes		
	1 3/8" All Series except 2500 & 2600	Agraset 122
	1 3/8" Series 2500 & 2600	Agraset 123
	1 3/4" All Series	Agraset 124
A S Yokes		
	25mmx10 Series 2100 & 2200	Agraset 120
	1" x 15	

LOCKING COLLAR SETS

Diagram	Description	Part Number
A S Yokes		
	1 3/8" All Series except 2500 & 2600	Agraset 117
	1 3/8" Series 2500 & 2600	Agraset 118
	1 3/4" All Series	Agraset 119
A S G E Yokes		
	1 3/8" All Series	Agraset 172
A Z G E Yokes		
	1 3/8" All Series	Agraset 173

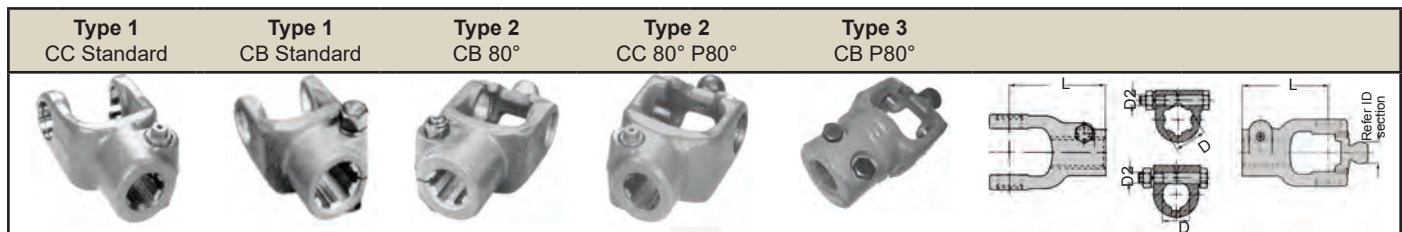

Series	Type	D Splines/Bore/Key	D2 mm	L mm	Part Number
2100	1.CB	1 1/8" x 6 Spl	12	89	10.10.05
	1.CB	1 3/8" x 6 Spl	12	89	10.10.06
	1.CB	1 3/8" x 21 Spl	12	89	10.10.15
	1.CB	25mm x 8mm K	12	95	10.10.110
	1.CB	30mm x 8mm K	12	89	10.10.07
	1.CB	1" x 1/4" K	12	95	10.10.142
	1.CB	1 1/8" x 1/4" K	12	95	10.10.144
	1.CB	1 1/4" x 1/4" K	12	95	10.10.146
	1.CB	1 1/4" x 5/16" K	12	95	10.10.148
2200	1.CB	1 1/8" Hex	12	98	20.10.141PB
	1.CB	27mm Hex	12	98	20.10.145
	1.CC	1 1/8" x 6Spl	12.5	98	20.10.34
	1.CB	1 3/8" x 6 Spl	12	98	20.10.02
	1.CB	1 3/8" x 21 Spl	12	98	20.10.119
	1.CB	35mm x 18 Spl	12	98	20.10.133
	1.CB	35mm x 16 Spl	12	98	20.10.149
	1.CB	25mm x 8mm K	12	98	20.19.121
	1.CB	30mm x 8mm K	12	98	20.10.04
	1.CB	1" x 1/4" K	12	98	20.19.127
	1.CB	1 1/8" x 1/4" K	12	98	20.19.129
	1.CB	1 1/4" x 1/4" K	12	98	20.10.121
	1.CB	1 1/4" x 5/16" K	12	98	20.10.123
	1.CB	1 1/4" x 3/8" K	12	98	20.34.110
	2.CB 80°	1 3/8" x 6 Spl	12	98	20.10.812
	2.CB 80°	1 3/8" x 21 Spl	12	98	20.10.821
2300	1.CB	1 1/8" Hex	12	107	21.10.129PB
	1.CB	27mm Hex	12	107	21.10.133
	1.CB	1 1/8" x 6 Spl	12	107	21.20.00
	1.CB	1 3/8" x 6 Spl	12	107	21.29.00
	1.CC	1 3/8" x 6 Spl	12	107	21.10.30
	1.CB	1 3/8" x 21 Spl	12	107	21.10.110
	1.CB	1 3/4" x 6 Spl	16	111	21.18.04
	1.CB	1 3/8" x 20 Spl	16	111	21.18.1750/20
	1.CB	30mm x 16 Spl	12	111	21.20.112
	1.CB	25mm x 8mm K	12	107	21.20.106
	1.CB	30mm x 8mm K	12	107	21.29.02
	1.CB	35mm x 10mm K	12	111	21.18.02
	1.CB ¥	35mm x 12mm K	12	111	21.18.116
	1.CB ¥	1" x 1/4" K	12	107	21.10.112
	1.CB	1 3/16" x 1/4" K	12	107	21.10.1188/250
	1.CB	1 1/4" x 1/4" K	12	107	21.10.108
	1.CB	1 1/4" x 5/16" K	12	107	21.10.114
	1.CB	1 3/8" x 5/16" K	12	111	21.18.136
	1.CB	1 1/2" x 3/8" K	12	111	21.18.146

Series	Type	D Splines/Bore/Key	D2 mm	L mm	Part Number
2300	2.CB 80°	1 3/8" x 6 Spl	12	107	21.10.814
	2.CB 80°	1 3/8" x 21 Spl	12	107	21.10.818
	2.CB 80°	30mm x 8mm K	12	107	21.10.816
	2.CB 80°	35mm x 10mm K	12	111	21.18.812
2400	1.CB	1 1/8" Hex	12	112	35.10.130
	1.CB	1 1/4" Hex	12	112	35.10.121
	1.CB	1 1/4" X 19 Spl	12	112	35.10.1250/19
	1.CC	1 1/4" X 19 Spl	12.5	112	35.18.1250/19
	1.CB	1 3/8" x 6 Spl	12	112	35.10.04
	1.CC	1 3/8" x 6 Spl	12.5	112	35.10.30
	1.CB	1 3/8" x 21 Spl	12	112	35.10.06
	1.CC	1 3/8" x 21 Spl	12.5	112	35.10.32
	1.CB	1 3/4" x 6 Spl	16	112	35.18.04
	1.CC	1 3/4" x 6 Spl	15.8	112	35.18.30
	1.CB	1 3/4" x 20 Spl	16	112	35.18.14
	1.CC	1 3/4" x 20 Spl	15.8	112	35.18.32
	1.CB	35mm x 18 Spl	12	112	35.18.114
	1.CB ¥	40mm x 20 Spl	12	112	35.18.135
	1.CB	40mm x 20 Spl	12	112	35.18.137
	1.CB	30mm x 8mm K	12	112	35.10.08
	1.CB	35mm x 10mm K	12	112	35.18.06
	1.CB ¥	40mm x 12mm K	12	112	35.18.110
	1.CB	1 3/16" x 1/4" K	12	112	35.10.1188/250
	1.CB	40mm x 12mm K	12	112	35.18.08
	1.CB	1 1/4" x 5/16" K	12	112	35.18.106
	1.CB	1 3/8" x 5/16" K	12	112	35.18.104
	1.CB ¥	1 3/8" x 3/8" K	12	112	35.18.123
	1.CB	1 1/2" x 3/8" K	12	112	35.18.102
	1.CB	1 1/2" plain bore	12	112	35.18.1500
	2.CB 80°	1 3/8" x 6 Spl	12	112	35.10.14
	2.CC 80°	1 3/8" x 6 Spl	12.5	112	35.10.830
	2.CB 80°	1 3/8" x 21 Spl	12	112	35.10.16
	2.CC 80°	1 3/8" x 21 Spl	12.5	112	35.10.832
	2.CB 80°	1 3/4" x 6 Spl	16	112	35.18.20
	2.CC 80°	1 3/4" x 6 Spl	15.8	112	35.18.830
	2.CB 80°	1 3/4" x 20 Spl	16	112	35.18.22
	2.CB 80°	30mm x 8mm K	12	112	35.10.18
	2.CB 80°	35mm x 10mm K	12	112	35.18.16
	2.CB 80°	40mm x 12mm	12	112	35.18.18
	2.CC P80°	1 3/8" x 6 Spl	12.5	112	35.10.316
	2.CC P80°	1 3/8" x 21 Spl	12.5	112	35.10.318
	2.CC P80°	1 3/4" x 6 Spl	15.8	112	35.18.310

¥ Non Interfering Bolt

CB Clamp Bolt

CC Clamp Cone



Series	D	D2	L	Part Number
Type	Spline/Bore/Key	mm	mm	
2500	1.CB	1 1/8" Hex	12	118 36.10.120.PB
	1.CB	1 3/8" x 6 Spl	12	118 36.10.08
	1.CC	1 3/8" x 6 Spl	12.5	118 36.10.30
	1.CB	1 3/8" x 21 Spl	12	118 36.10.06
	1.CB	1 3/8" x 21 Spl	14	118 36.10.111
	1.CC	1 3/8" x 21 Spl	12.5	118 36.10.32
	1.CB	1 1/2" x 23 Spl	12	135 36.18.1523
	1.CB	1 3/4" x 6 Spl	16	118 36.18.04
	1.CC	1 3/4" x 6 Spl	15.8	118 36.18.30
	1.CB ¥	1 3/4" x 13 Spl	16	118 36.18.1750/13
	1.CB	1 3/4" x 20 Spl	16	98 36.18.184
	1.CB	1 3/4" x 20 Spl	16	118 36.18.06
	1.CC	1 3/4" x 20 Spl	15.8	118 36.18.32
	1.CB	1 3/4" x 27 Spl	16	118 36.18.110
	1.CC	45mm x 22 Spl	15.8	118 36.18.137
	1.CB	35mm x 10mm K	12	118 36.18.14
	1.CB	40mm x 12mm K	12	118 36.18.08
	1.CB §	45mm x 14mm K	16	118 36.18.124
	1.CB	1 1/4" x 5/16" K	12	118 36.18.1250/312
	1.CB	1 3/8" x 3/8" K	12	118 36.18.106
	1.CB	1 1/2" x 3/8" K	12	118 36.18.1500
	1.CB	1 3/4" x 1/2" K	16	118 36.18.104
	2.CB 80°	1 3/8" x 6 Spl	12	118 36.10.16
	2.CB 80°	1 3/8" x 6 Spl	14	118 36.10.119
	2.CC 80°	1 3/8" x 6 Spl	12.5	118 36.10.830
	2.CC P80°	1 3/8" x 6 Spl	12	118 36.10.330
	2.CC P80°	1 3/8" x 21 Spl	12	118 36.10.332
	2.CC P80°	1 3/4" x 6 Spl	12	118 36.18.330
	2.CC P80°	1 3/4" x 20 Spl	12	118 36.18.332
	2.CB 80°	1 3/8" x 21 Spl	12	118 36.10.14
	2.CB 80°	1 3/8" x 21 Spl	14	118 36.10.114
	2.CC 80°	1 3/8" x 21 Spl	12.5	118 36.10.832
	2.CB 80°	1 1/2" x 23 Spl	12	135 36.18.81523
	3.CB P80°	1 1/2" x 23 Spl	12	135 36.18.51523
	2.CB 80°	1 3/4" x 6 Spl	16	118 36.18.18
	2.CB 80°	1 3/4" x 20 Spl	16	118 36.18.20
	2.CC 80°	1 3/4" x 20 Spl	15.8	118 36.18.832
	2.CB 80°	1 1/2" x 3/8" K	12	118 36.18.8150
	3.CB P80°	1 1/2" x 3/8" K	12	148 36.18.5150

Series	D	D2	L	Part Number
Type	Spline/Bore/Key	mm	mm	
2600	1.CB	1 3/8" x 6 Spl	12	128 26.10.06
	1.CC	1 3/8" x 6 Spl	12.5	128 26.10.30
	1.CB	1 3/8" x 21 Spl	12	128 26.10.04
	1.CC	1 3/8" x 21 Spl	12.5	128 26.10.32
	1.CC	1 3/4" x 6 Spl	15.8	128 26.18.30
	1.CB	1 3/4" x 6 Spl	16	128 26.18.100
	1.CB	1 3/4" x 20 Spl	16	128 26.18.102
	1.CC	1 3/4" x 20 Spl	15.8	128 26.18.32
	1.CB	40mm x 12mm K	12	128 26.18.04
	1.CB	45mm x 14mm K	12	128 26.18.113
	1.CB	1 3/4" x 1/2" K	16	128 26.18.106
	2.CC P75°	1 3/4" x 20 Spl	15.8	128 26.18.332
P700	1.CC	1 3/4" x 6 Spl	15.8	155 27.18.30
	1.CC	1 3/4" x 20 Spl	15.8	155 27.18.32
P800	1.CC §	1 3/4" x 20 Spl	19.8	162 28.18.32
	1.CB §	1 3/4" x 20 Spl	16	165 28.18.01
	1.CC	1 3/4" x 20 Spl	15.8	187 28.18.36
	1.CC	1 3/4" x 20 Spl H	19.8	187 28.18.40
	1.CC	2 1/4" x 22 Spl	19.8	195 28.18.38

Clamping Cone				
	Description	D2	Torque Nm	Part Number
	1 3/8" All Series	12.5mm	100	65.12.06
	1 3/4" All Series	15.8mm	100	65.12.08
	2 1/4" All Series	19.8mm	100	65.12.13


¥ Non Interfering Bolt

CB Clamp Bolt

H Hardened

CC Clamp Cone

§ Short Ear Yoke

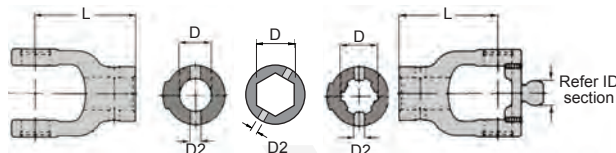Type 1
StandardType 2
80°

Series	Type	D Spline / Bore	D2 mm	L mm	Part Number
2100	1	7/8" Hex	-	78	10.22.0875HEX
	1	1" Hex	-	78	10.22.1000HEX
	1	20mm	6	78	10.22.152
	1	25mm	8	78	10.22.113
	1	30mm	10	78	10.22.108
	1°°	30mm	10,8	78	10.22.196
	1°°	30mm (VICON)	10,16	78	10.22.284
	1	1"	5/16"	78	10.22.295
	1	1 1/8"	5/16"	78	10.22.290
	1	1 1/4"	3/8"	78	10.22.291
	1	20mm x 12 Spl	-	78	10.22.180
	1	25mm x 6 Spl	6	70	10.22.241
	1	25mm x 10 Spl	8	65	10.22.338
	1	25mm x 13 Spl	-	78	10.22.352
	1	25mm x 14 Spl	8	65	10.22.357
	1	25mm x 18 Spl	8	78	10.22.286
	1	30mm x 16 Spl	8	65	10.21.109
	1	1" x 15 Spl	8	65	10.22.343
	1	1 1/8" x 6 Spl	8	65	10.21.112
	1	1 3/8" x 6 Spl	8	68	10.22.380
	1	1 3/8" x 6 Spl	8	78	10.22.199
	1	1 3/8" x 6 Spl		96	10.22.372

Series	Type	D Spline / Bore	D2 mm	L mm	Part Number
2200	1	20mm	6	80	20.15.06
	1	22mm	8	80	20.15.08
	1	25mm	8	80	20.15.11
	1	30mm	10	80	20.30.02
	1	30mm (CLAAS)	10	65	20.30.119
	1	1"	5/16"	80	20.15.156
	1	1 1/4"	3/8"	80	20.30.126
	1	1 3/8"	-	80	20.38.1375
	1	7/8" Hex	-	80	20.15-0875HEX
	1	1 1/4" Hex	1/2"	80	20.38.117
	1	1"Hex x 13Tsprocket	3/8"	82	20.15.154
	1	1 1/8" x 6 Spl	8	80	20.15.105
	1	1 3/8" x 6 Spl	8	80	20.38.101
	1	1 3/8" x 6 Spl	-	80	20.38.128
	1	1 3/8" x 6 Spl	-	113	20.15.220
	1	1 3/8" x 6 Spl	-	126	20.15.230
	1	1 3/8" x 21 Spl	-	66	20.38.142
	1	1 3/8" x 21 Spl	-	80	20.38.120
	1	1 3/8" x 21 Spl	11	80	20.38.121
	1	1 3/8" x 21 Spl	-	102	20.15.207
	1	1 3/8" x 21 Spl	-	126	20.39.121
	1	1 3/4" x 6 Spl(H)	-	130	20.38.134
	1	25mm x 14 Spl	8	70	20.15.167
	1	25mm x 18 Spl	8.5	80	20.15.161
	1	30mm x 22 Spl	10	98	20.15.199
	2. 80°	35mm	13	80	20.15.848

Note: Splined Yoke Option Nipples & Greasing Grooves

§ Short Ear Yoke


°° 2 x Pin Holes

H Hardened

† Tarrup

f John Deere

Type 1
Standard

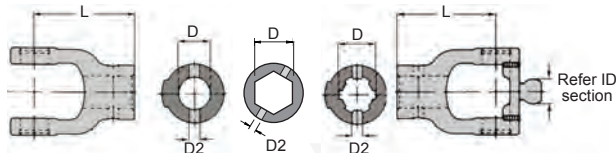Type 2
80°


Series	Type	D Spline / Bore	D2 mm	L mm	Part Number
2300	1	Solid Hub			21.88-000
	1	22mm	8	95	21.15.04
	1	25mm	8	95	21.15.07
	1	30mm	10	95	21.30.04
	1	35mm	13	95	21.30.05
	1	1 1/8"	10	95	21.15.117
	1	1 1/4"	3/8"	95	21.24.150
	1	1 3/8"	1/2"	95	21.24.151
	1	1 1/8" Hex	9	95	21.15.113
	1	1 1/8" x 6 Spl	8	95	21.15.103
	1	1 1/4" x 6 Spl	1/2"	95	21.15.104
	1	1 1/4" x 19 Spl	-	95	21.15.109
	1§	1 3/8" x 6 Spl (†)	8	75	21.70.106
	1	1 3/8" x 6 Spl	8	95	21.30.105
	1	1 3/8" x 6 Spl	-	95	21.30.148
	1	1 3/8" x 6 Spl	-	130	21.25.108
	1	1 3/8" x 21 Spl (f)	-	81	21.24.202
	1	1 3/8" x 21 Spl	-	95	21.24.144
	1□	1 3/8" x 21 Spl (f)	-	116	21.30.137
	1	1 3/8" x 21 Spl	-	130	21.25.115
	1	1 3/8" x 21 Spl	-	135	21.25.110
2400	1	1 1/2" x 11 Spl (f)	-	81	21.24.203
	1	1 3/4" x 6 Spl	-	133.5	21.25.111
	1	1 3/4" x 6 Spl	-	143	21.25.118
	1	30mm	10	105	35.22.04
	1	35mm	13	105	35.22.00
	1	40mm	15	102	35.24.117
	1	1 1/4"	3/8"	105	35.22.100
	1	1 3/8"	1/2"	105	35.22.101
	1	1 7/16"	1/2"	105	35.22.102
	1	1 1/8" Hex	8.3	105	35.22.130
	1	35mm x 18 Spl	-	126	35.22.161
	1§	35mm x 18 Spl	10	87	35.13.114
	1	1 3/8" x 6 Spl	8	105	35.22.106
	1	1 3/8" x 6 Spl	-	118	35.22.152
	1§	1 3/8" x 21 Spl	8	86	35.79.111
	1	1 1/4" x 14 Spl	3/8"	105	35.22.177
	1	1 3/4" x 20 Spl	-	105	35.24.1750/20
	1	1 3/4" x 27 Spl	-	112	35.24.1750/27
	1	40mm x 20Spl	-	126	35.24.140

Series	Type	D Spline / Bore	D2 mm	L mm	Part Number
2500	1	30mm Pilot hole	-	118	36.24.139
	1	35mm	13	110	36.22.00
	1	35mm Forged	-	110	36.22.00SP
	1	40mm	13	118	36.24.00
	1§	40mm x 20 Spl	-	82	36.24.140
	1	40mm x 20 Spl	-	130	36.24.142
	1	1 3/8"	1/2"	110	36.22.101
	1	1 7/16"	1/2"	110	36.22.102
	1	1 1/4" x 14 Spl	3/8"	118	36.22.177
	1	1 3/8" x 6 Spl	10	110	36.22.107
	1	1 3/8" x 6 Spl	-	118	36.24.1375/6
	1§	1 3/8" x 21 Spl	-	82	36.24.125
	1	1 1/2" x 23 Spl	-	110	36.22.100
	1	1 3/4" x 6 Spl	-	118	36.24.120
	1§	1 3/4" x 20 Spl	10	82	36.24.147
	1	1 3/4" x 20 Spl	-	118	36.24.132
	1	1 3/4" x 27 Spl	3/8"	110	36.24.128
2600	1	35mm	13	130	26.22.00
	1	40mm	13	130	26.22.01
	1	55mm x 26 Spl	-	130	26.22.118
	1	1 3/4" x 20 Spl	-	130	26.15.112
P700	1□	52mm x 25 Spl	8	165	27.22.108
	1	52mm x 26 Spl	-	152	27.22.106
	1	55mm x 26 Spl	8	155	27.22.110
	1	60mm x 28 Spl	-	152	27.22.112

Note: Splined Yoke Option Nipples & Greasing Grooves

§ Short Ear Yoke


°° 2 x Pin Holes

H Hardened

† Tarrup

f John Deere

□ Master Spline

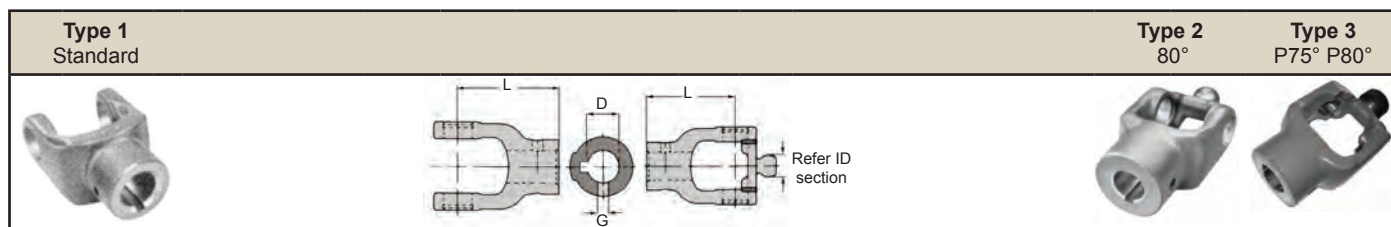


Series	Type	D Bore x Keyway	G mm	L mm	Part Number
2100	1	20mm x 6mm	8	78	10.22.27
	1	22mm x 6mm	10	78	10.22.29
	1	25mm x 8mm	10	78	10.22.31
	1	30mm x 8mm	10	78	10.22.33
	1	35mm x 10mm	10	78	10.40.110
	1	3/4" x 3/16"	3/8"	78	10.22.322
	1	7/8" x 3/16"	3/8"	78	10.22.337
	1	1" x 1/4"	3/8"	78	10.22.142
	1	1 1/8" x 1/4"	3/8"	78	10.22.143
	1	1 1/4" x 1/4"	3/8"	78	10.22.299
	1	1 1/4" x 5/16"	3/8"	78	10.22.300
	1	1 1/4" x 3/8"	3/8"	78	10.22.294
2200	1	20mm x 6mm	8	80	20.15.15
	1	22mm x 6mm	10	80	20.15.16
	1	25mm x 6mm	10	80	20.15.146
	1	25mm x 8mm	10	80	20.15.17
	1	30mm x 8mm	10	80	20.30.05
	1	32mm x 10mm		80	20.38-32/10
	1	35mm x 10mm	10	80	20.11.105
	1	3/4" x 3/16"	3/8"	80	20.15.750
	1	7/8" x 3/16"		80	20.15.875
	1	1" x 1/4"	3/8"	80	20.15.162
	1	1 1/8" x 1/4"	3/8"	80	20.15.163
	1	1 1/4" x 1/4"	3/8"	80	20.30.128
	1	1 1/4" x 5/16"	3/8"	80	20.30.129
	1	1 1/4" x 3/8"	3/8"	80	20.30.127
	1	1 5/16" x 5/16"		80	20.38-1312/312
	1	1 3/8" x 3/8"	3/8"	80	20.30.1375
2300	1	22mm x 6mm	12	95	21.15.10
	1	25mm x 8mm	12	95	21.15.11
	1	30mm x 8mm	12	95	21.30.07
	1**	30mm x 10mm	2 x 12	95	21.24.205
	1	1" x 1/4"	3/8"	95	21.25.102
	1	1 1/8" x 1/4"	3/8"	95	21.15.119
	1	1 1/4" x 1/4"	3/8"	95	21.24.158
	1	1 1/4" x 5/16"	3/8"	95	21.24.159
	1	1 3/8" x 5/16"	3/8"	95	21.24.160
	1	1 3/8" x 1/4"	3/8"	95	21.24.1375/25
	1	1 1/2" x 3/8"	3/8"	95	21.24.172
	2. 80°	30mm x 8mm	12	95	21.24.826
	2. 80°	35mm x 10mm	12	95	21.24.827

Series	Type	D Bore x Keyway	G mm	L mm	Part Number
2400	1	30mm x 8mm	12	105	35.22.02
	1	35mm x 10mm	12	112	35.24.12
	1	40mm x 12mm	12	112	35.24.10
	1	45mm x 14mm	12	112	35.24.116
	1	1 1/4" x 5/16"	3/8"	105	35.22.115
	1	1 3/8" x 3/8"	3/8"	112	35.24.103
	1	1 7/16" x 3/8"	3/8"	112	35.24.106
	1	1 1/2" x 3/8"	3/8"	112	35.24.107
	2. 80°	35mm x 10mm	12	118	35.24.22
	2. 80°	40mm x 12mm	12	118	35.24.23
2500	1	35mm x 10mm	12	118	36.24.01
	1	40mm x 12mm	14	118	36.24.108
	1	45mm x 14mm	14	118	36.24.02
	1	48mm x 14mm		118	36.22-48/14
	1	50mm x 14mm	14	118	36.22.134
	1	1 3/8" x 3/8"	3/8"	118	36.24.106
	1	1 1/2" x 3/8"	3/8"	118	36.24.100
	1	1 3/4" x 1/2"	1/2"	118	36.24.101
	1	2" x 1/2"	1/2"	118	36.22.2000
	2. 80°	35mm x 10mm	14	118	36.24.22
2600	3. P80°	35mm x 10mm	14	118	36.24.310
	3. P80°	40mm X 12mm	14	118	36.24.311
	1	35mm x 10mm	14	130	26.22.02
	1	40mm x 12mm	14	130	26.22.03
	1	50mm x 14mm	14	130	26.22.05
	1	2" x 1/2"	1/2"	130	26.22.115
	3. P75°	40mm x 12mm		138	26.84.64

Note: Special sizes available on request.

§ Short Ear Yoke

°° 2 x Set Screw Holes

DOUBLE YOKE





Series	d mm	L mm	Part Number
2100	22	65	10.28.00
2200	24	78	20.23.103
2300	27	75	21.26.00
		92	21.26.104
		115	21.26.103
2400	32	72	35.26.00
		100	35.28.00
		144	35.28.103
2500	36	90	36.29.02
		100	36.29.00
		118	36.28.00
2600	42	130	26.28.00

SPECIAL YOKE



Special OEM Fitting

Series	Description (Not illustrated or shown elsewhere in Catalogue)	Part Number
2100	Amazon ShearBolt	10.17.102
	Vicon Spreader Clutch	10.32.101
	Hardi Pump 25mm Taper	10.34.104
	Hardi Pump 30mm Taper	10.34.105
2200	Hardi Pump 25mm Taper	20.34.104
	Hardi Pump 30mm Taper	20.35.105
2300	Yoke Stub 1 3/4" X 20Spl L=245	21.70.131
	Claas 30mm x 16 Spl CB	21.20.112
2400	Claas Jaguar 880/860	35.10.158
	New Holland Clutch	35.37.100
	Claas Clutch	35.45.100
2500	Kemper Header Stub Yoke 1 3/4 x 20 L=164	36.71.101



Type 1 Standard		Type 2 80°							Type 3 P75° P80°
		  							
Series	Type	D mm	D1 mm	D2 # Holes x Diameter mm	D3 Female mm	D4 Male mm	L2 mm	L mm	Part Number
2100	1	75	62	6 x 6.2	42	-	2	60	10.27.01
	1	100	84	6 x 8.2	57	-	2.5	52	10.31.03
	1	100	84	6 x 10.2	57	-	2.5	52	10.31.102
2200	1	55	62	8 x 8.2	-	-	-	77	20.24.108
	1	75	62	6 x 6.2	42	-	2	70	20.16.01
	1	87	69.5	4 x 8.2	-	57	3	70	20.16.101
	1	90	74.5	4 x 8.2	47	-	2.5	70	20.16.00
	1	100	84	6 x 8.2	57	-	2.5	55	20.24.01
	1	120	94	6 x 10.2	-	-	-	48	20.42.105
	1	150	100/125	7 x 11	-	65	2	48	20.42.104
2300	1	90	74.5	4 x 8.2	47	-	2.5	70	21.16.02
	1	100	84	6 x 8.2	57	-	2.5	78	21.16.00
	1	120	101.5	8 x 8.2	75	-	2.5	71	21.66.00
	1	130.5	114	6 x 10.2	-	82	1.5	58	21.32.01
	1	136	118	6 x 10.2	-	98	1.5	58	21.32.03
	1	150	120	4 Slots x 13	-	-	-	58	21.32.106
	1	158	138	6 x 12.2	-	98	2.5	73	21.79.100
	1	188	167	10 x 12.5	152	-	1.3	70	21.73.01
	2. 80°	136	118	6 x 10.2	-	98	2	58	21.32.816
2400	1	100	84	6 x 8.2	57	-	2.5	84	35.16.00
	1	120	95	4 x 14	-	78	1.5	85	35.27.100
	1	120	101.5	8 x 8.2	75	-	2.5	86	35.27.00
	1	130	114	6 x 10	-	82	1.5	66	35.20.00 (Kuhn)
	1	136	118	6 x 10.2	-	98	1.5	66	35.20.100
	1	160	138	6 x 12.2	-	-	-	66	35.19.01
	1	160	138	6 x 12.2	-	98	2	66	35.19.02
	1	160	139	6 x 12.2	-	-	-	68	35.75.100 (Lely)
	1	188	167	10 x 12.5	152	-	1.3	77	35.73.01
	1	190	165	6 x 13.2	80	-	8	80	35.73.100 (Howard)
	2. 80°	100	84	6 x 8.2	57	-	2.5	97	35.16.10
	2. 80°	120	101.5	8 x 8.2	75	-	2.5	97	35.27.10
	2. 80°	160	138	6 x 12.2	65.5	98	1.3	72	35.19.107 (Kuhn)
	2. 80°	160	138	6 x 12.2	-	98	1.5	72	35.19.10
	2 P80°	160	138	6 x 12.2	-	98	2	76	35.19.310
2500	1	120	101.5	8 x 8.2	75	-	2.5	96	36.27.00
	1	120	101.5	8 x 8.2	-	75	2.5	96	36.27.100
	1	150	130	8 x 10.2	90	-	2.5	72	36.19.03
	1	160	138	6 x 12.2	-	98	2	72	36.19.02
	1	160	139	6 x 12.2	-	-	-	70	36.75.100 (Lely)
	1	188	167	10 x 12.5	152	-	1.3	87	36.73.01
	1	190	165	6 x 13.2	80	-	8	70	36.73.100 (Howard)
	2. 80°	150	130	8 x 10	-	98	2	85	36.19.11
	2. 80°	120	101.5	8 x 8.2	75	-	2.5	96	36.27.10
	2. 80°	160	138	6 x 12.2	-	98	2	87.5	36.19.10
	3.P80°	160	138	6 x 12.2	-	98	2	85	36.19.310

§ Short Ear Yoke

Type 1 Standard		Type 2 80°		Type 3 P75° P80°					
									
									
Series	Type	D mm	D1 mm	D2 # Holes x Diameter mm	D3 Female mm	D4 Male mm	L2 mm	L mm	Part Number
2600	1	120	101.5	8 x 8.2	75	-	2.5	130	26.15.101
	1	160	138	12 x 12.2	-	98	2	115	26.15.106
	1	180	155.5	8 x 14.2	110	-	2.4	80	26.73.00
	1	188	167	8 x 12.5	152	-	1.3	80	26.73.01
	1	190	165	6 x 13.2	80	-	8	82	26.73.100 (Howard)
	3.P75°	160	138	12 x 12.2	-	98	2	108	26.75.00
P700	1	160	138	12 x 12.2	-	98	-	165	27.15.101
	1	195	165	8 x 12.5	90	-	3.2	110	27.73.102




Type 1 - Standard




Type 2 - 80°



Type 3 - P75° P80°

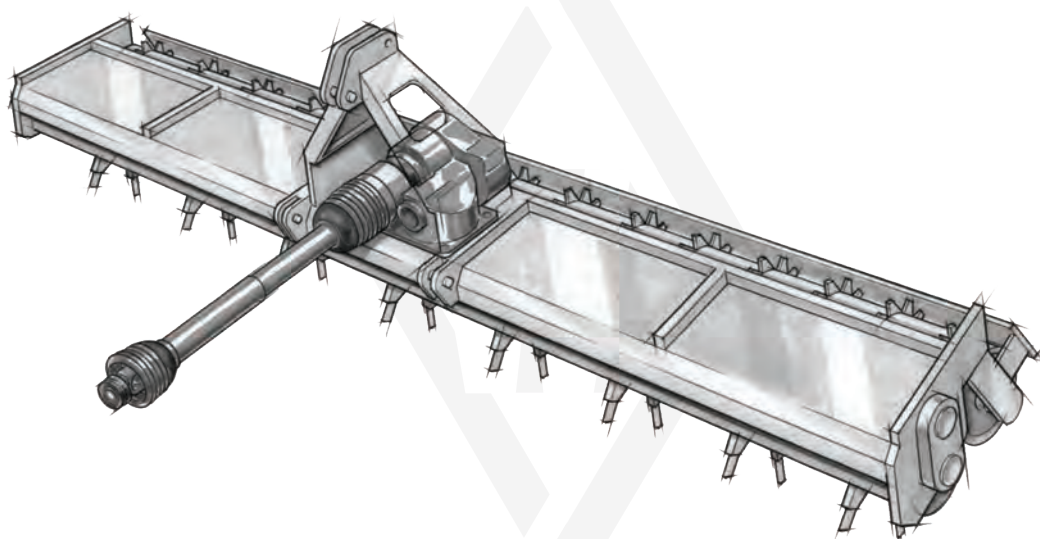

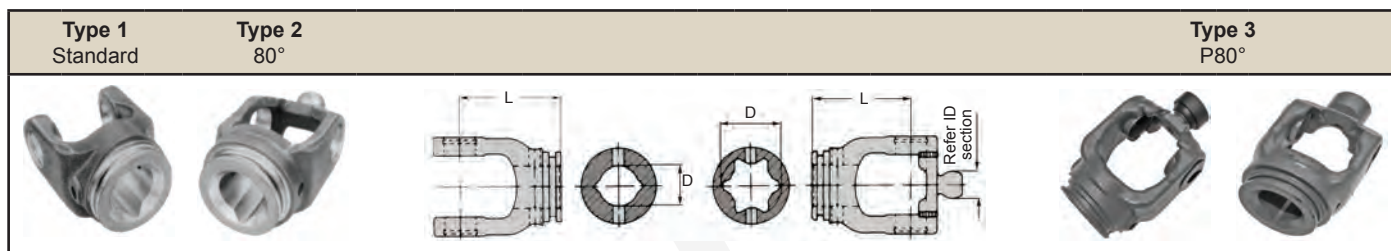

Series	Type	Tube Profile D	Inner / Outer	L mm	Part Number
2100	1	00a / 00c	Inner	66	10.48.00
	1	0a	Outer	66	10.49.00
	1	0v	Inner	73	10.40.00
	1	1	Outer	73	10.41.00
	1	25mm x 14Spl	Inner	66	10.48.02
2200	1	00a / 00c	Inner	70	20.32.00
	1	0a	Outer	70	20.33.00
	1	0v	Inner	75	20.11.00
	1	1	Outer	75	20.12.00
	1	30mmx16Spl SC15	Inner	75	20.11.02
	2. 80°	00a / 00c	Inner	70	20.32.810
	2. 80°	0a	Outer	70	20.33.810
	2. 80°	0v	Inner	75	20.11.810
	2. 80°	1	Outer	75	20.12.810
2300	1	0v	Inner	85	21.11.00
	1	1	Outer	85	21.12.00
	1	1b	Inner	85	21.22.100
	1	2a	Outer	90	21.22.101
	1	1b PG 20	Inner	95	21.13.20
	1	2a PG 20	Outer	100	21.14.20
	1	1 3/8" x6Spl (SC15)	Inner	120	21.12.128
	1	35mm x 18Spl	Inner	85	21.11.02
	2. 80°	0v	Inner	85	21.11.810
	2. 80°	1	Outer	85	21.12.810
	2. 80°	1b	Inner	85	21.42.810
	2. 80°	2a	Outer	85	21.43.810
	2. 80°	35mmx18Spl SC15	Inner	92	21.11.118


Series	Type	Tube Profile D	Inner / Outer	L mm	Part Number
2400	1	1b	Inner	92	35.13.00
	1	2a	Outer	102	35.14.00
	1^	2a	Outer	120	35.14.193
	1	S4	Inner	92	35.13.100
	1^	S4	Inner	120	35.13.125
	1	S5	Outer	102	35.14.100
	1	42mm x 8 Spl	Inner	92	35.13.01
	1	40mm x 20 Spl	Inner	92	35.13.02
	1	40mm x 20 Spl	Inner	76	35.70.103
	1	Tube Weld SC25		88	35.14.04
	2. 80°	1b	Inner	92	35.13.10
	2. 80°	2a	Outer	92	35.14.10
	2. 80°	S4	Inner	92	35.13.109
	2. 80°	S4 Centre Lube	Inner	92	35.13.112
	2. 80°	S5	Outer	92	35.14.174
	2. 80°	S5 Centre Lube	Outer	92	35.14.181
	3. P80°	1b Centre Lube	Inner	92	35.13.310
	3. P80°	2a Centre Lube	Outer	92	35.14.310
	3. P80°	S4 Centre Lube	Inner	92	35.13.311
	3. P80°	S5 Centre Lube	Outer	92	35.14.311



W - High Rotation Design



P Class Tube Yoke

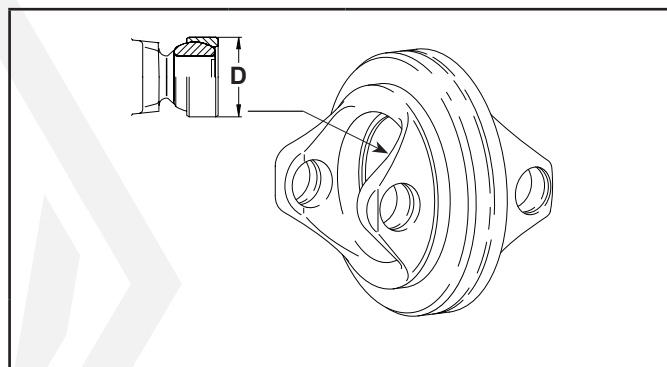


P Class Wide Angle Design

Series	D mm	
P480	33	
P580	39	
P675	39	

D for dimensions of profile refer to ID section


» Welded to Round Tube

^ Rotating Bend Angle 70°

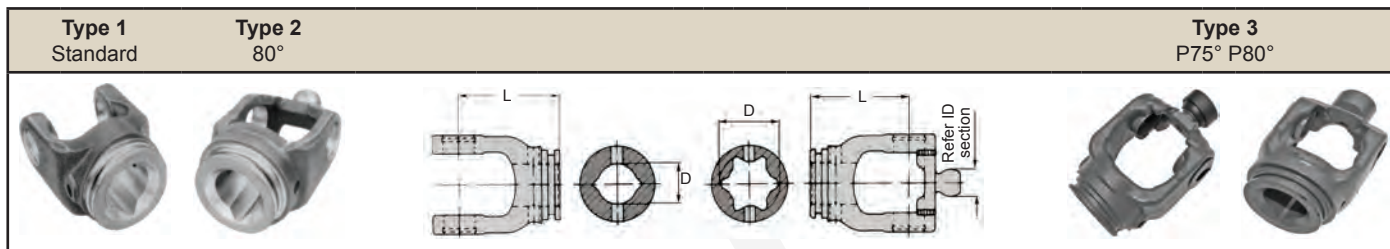

Series	Type	Tube Profile D	Inner / Outer	L mm	Part Number
2500	1	1s	Inner	106	36.13.00
	1	2s	Outer	112	36.14.00
	1	S4	Inner	106	36.13.100
	1^	S4	Inner	122	36.26.100
	1	S5	Outer	112	36.14.100
	1^	S4 PG 20	Inner	122	36.26.101
	1	42mm x 8 Spl	Inner	106	36.13.01
	1	40mm x 20 Spl	Inner	106	36.13.02
	1	40mm x 20 Spl	Inner	80	36.24.140
	2. 80°	1s	Inner	106	36.13.10
	2. 80°	2s	Outer	106	36.14.10
	2. 80°	S4	Inner	106	36.13.104
	2. 80°	S4 Central Lube	Inner	106	36.13.116
	2. 80°	S5	Outer	106	36.14.116
	2. 80°	S5 Central Lube	Outer	106	36.14.164
	2. 80°	40mm x 20 Spl	Inner	106	36.13.12
	3. P80°	S4 Central Lube	Inner	106	36.13.312
	3. P80°	S5 Central Lube	Outer	106	36.14.312

Series	Type	Tube Profile D	Inner / Outer	L mm	Part Number
2600	1	S4 (SC25)	Inner	130	26.13.100
	1	S5 (SC25)	Outer	130	26.14.100
	1	S5 (SC35)	Inner	130	26.13.00
	1	S6 (SC35)	Outer	130	26.14.00
	1	S5 PG 30	Inner	140	26.13.30
	1	S6 PG 30	Outer	140	26.14.30
	1	52mm x 25Spl	Inner	130	26.13.02
	3. P75°	S4 Central Lube	Inner	125	26.13.60
	3. P75°	S5 Central Lube	Inner/Outer	125	26.13.61
P700	1	52mmx25Spl SC35	Inner	150	27.13.02
	1	52mmx25Spl PG30	Inner	150	27.13.31
	1	S5 PG 30	Inner	133	27.13.30
	1	S6 PG 30	Outer	133	27.14.30
	1	Tube Weld SC35	Outer	155	27.14.02
	1	Tube Weld PG30	Outer	152	27.14.31
P800	1	60mm x 28spl	Inner	150	28.13.02
	1	Tube Weld PG30	Outer	180	28.14.102

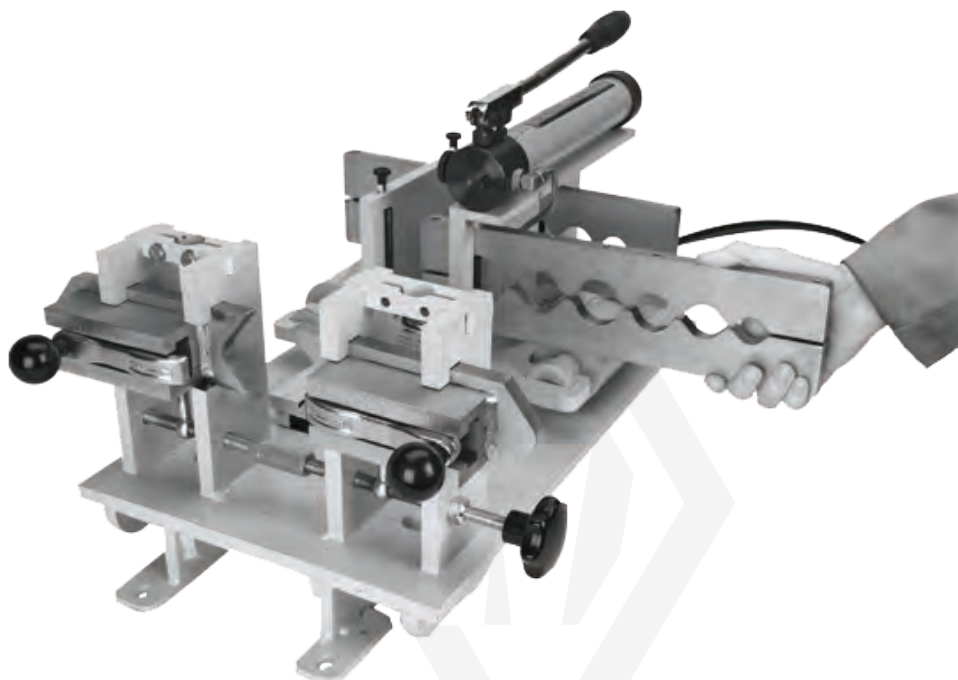

Hydraulic Tube Yoke Remover and Press

D for dimensions of profile refer to ID section

» Welded to Round Tube



^ Rotating Bend Angle 70°

TUBE PROFILES

STANDARD & HARDENED



TEFLON COATED

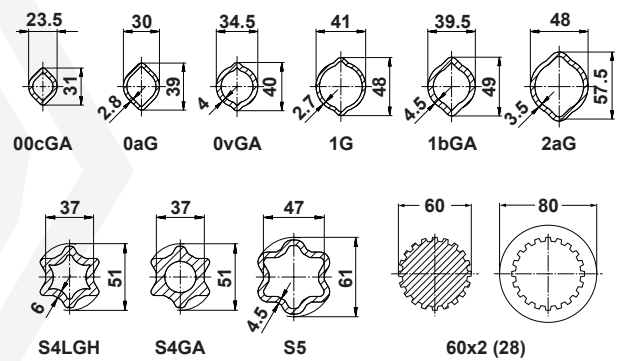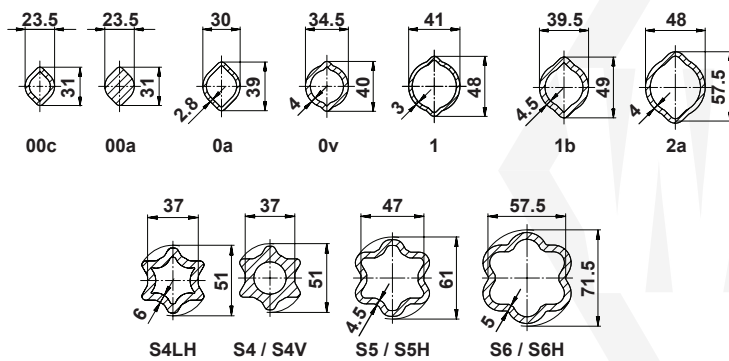

Series	Inner Profile Type	Inner Part Number	Maximum Length Available (mm)	Matching Outer Part Number	Outer Profile Type	Roll Pin
2100	00c	75.02.00	3000	75.12.00	0a	61.04.01
2100	00cGA	75.02.95	1000	75.13.00	0aG	61.04.01
2100	0v	75.11.00	3000	75.15.00	1	61.04.05
2200	00c	75.02.00	3000	75.12.00	0a	61.04.05
2280	00cGA	75.02.95	1000	75.13.00	0aG	61.04.05
2200	0v	75.11.00	3000	75.15.00	1	61.05.04
2280	0vGA	75.11.95	1400	75.16.00	1G	61.05.04
2300	0v	75.11.00	3000	75.15.00	1	61.05.04
2380	0vGA	75.11.95	1400	75.16.00	1G	61.05.04
2300 / P300	1b	75.25.00	3000	75.35.00	2a	61.05.08
2380	1bGA	75.25.95	1400	75.36.00	2aG	61.05.08
2400 / P400	1b	75.25.00	3000	75.35.00	2a	61.05.08
2480 / P480	1bGA	75.25.95	1400	75.36.00	2aG	61.05.08
2480 / P480	S4LH	75.43.104	1400	75.45.00	S5	61.05.08
2480 / P480	S4LGA	75.43.95	1000	75.45.00	S5	61.05.08
2500 / P500	S4	75.44.00	3000	75.45.00	S5	61.05.12
2580 / P580	S4GA	75.44.95	1400	75.45.00	S5	61.05.12
2600 / P600	S4	75.44.00	3000	75.45.00	S5	61.05.13
P675	S4GA	75.44.95	1400	75.45.00	S5	61.06.08
P675	S5H	75.45.230	1400	75.46.55	S6H	61.06.08
P700	S5H	75.45.230	1400	75.46.00	S6	61.06.08
P800	60mm x 28H	67.80.01	690	67.91.01	60mm x 28	-