

GEARBOXES

SLASHER GEARBOX



Max H.P.		Input Torque Nm	Ratio	Mounting Holes			Input	Output	Part Number
kW	HP			Qty	PCD	Pattern			
22	30	197	1:1.92	4	171.50	Square	1 3/8" x 6	Hub Connection	MG-205-805
44	60	391	1:1.93	4	203.20	Evenly Spaced	1 3/8" x 6	Hub Connection	MG-140-804
44	60	756	1:1	6	177.80	Evenly Spaced	1 3/8" x 6	Hub Connection	9.132.007
55	75	516	1:1.83	6	203.20	Evenly Spaced	1 3/8" x 6	Hub Connection	9.227.804#
74.6	100	1030	1:1.22	4	203.20	Evenly Spaced	1 3/8" x 6	Hub Connection	U10.100.006.10
74.6	100	863	1:1.46	4	203.20	Evenly Spaced	1 3/8" x 6	Hub Connection	U10.100.005.10
74.6	100	686	1:1.83	4	203.20	Evenly Spaced	1 3/8" x 6	Hub Connection	U10.100.007.10

SLASHER GEARBOX (4 Way T-Box)



Max H.P.		Input Torque Nm	Ratio	Mounting Holes			Rotation	Input	Output	Part Number
kW	HP			Qty	PCD	Pattern				
66	88	615	1:1.84	6	177.80	Evenly Spaced	STANDARD	1 3/8" x 6	Hub Connection	9.266.008
66	88	615	1:1.84	6	177.80	Evenly Spaced	OPPOSITE	1 3/8" x 6	Hub Connection	9.266.012

www.walterscheid.com.au

Document No:	SABRECAT
Issue:	1
Issue Date:	20/04/2019

Note: More gearbox options and configurations are available on request, contact your local branch for more information.

INDENT ITEM ONLY

GEARBOXES

ALUMINIUM - COMPACT BEVEL RIGHT ANGULAR GEARBOX



Max H.P.		Input Torque Nm	Ratio	Mounting Holes			Input	Output	Part Number
kW	HP			Qty	PCD	Pattern			
2.2	3	39	3.3:1		90.00	Square	25mm	25mm	8301919
7	9	117	1.9:1		90.00	Square	25mm	25mm	8305015
11	15	195	1:1		90.00	Square	25mm	25mm	8305009
18	25	261	1:1		108.00	Square	35mm	35mm	8305024

STEEL - COMPACT BEVEL RIGHT ANGULAR GEARBOX



Max H.P.		Input Torque Nm	Ratio	Mounting Holes			Input	Output	Part Number
kW	HP			Qty	PCD	Pattern			
4	6	71	2.9:1		88.00	Square	30mm	30mm	8301942
12.5	17	221	2:1		88.00	Square	30mm	30mm	8301941
12.5	17	221	2:1		88.00	Square	1 3/8" x 6	1 3/8" x 6	8301934
26.5	36	468	1:1		88.00	Square	30mm	30mm	8301938
26.5	36	468	1:1		88.00	Square	1 3/8" x 6	1 3/8" x 6	8301933
18	25	325	1.92:1		110.00	Square	1 3/8" x 6	1 3/8" x 6	8301956
29	40	520	1:1.92		110.00	Square	1 3/8" x 6	1 3/8" x 6	8301955
37	50	651	1:1.46		110.00	Square	1 3/8" x 6	1 3/8" x 6	8301953
49	66	859	1:1		110.00	Square	1 3/8" x 6	1 3/8" x 6	8301952
43	58	755	1:1.92		115.00	Square	1 3/8" x 6	1 3/8" x 6	8301925
66	90	1171	1:1		115.00	Square	1 3/8" x 6	1 3/8" x 6	8301924
77.2	103	2555	1:1.93		160.00	Square	1 3/4" x 20	1 3/4" x 20	9.301.281

Note: More gearbox options and configurations are available on request, contact your local branch for more information.

INDENT ITEM ONLY

B:7-72


www.walterscheid.com.au

Document No:	SABRECAT
Issue:	1
Issue Date:	20/04/2019

This catalogue is the copyright of HS Company Pty Ltd

GEARBOXES

STEEL - COMPACT SPEED MULTIPLIER GEARBOX

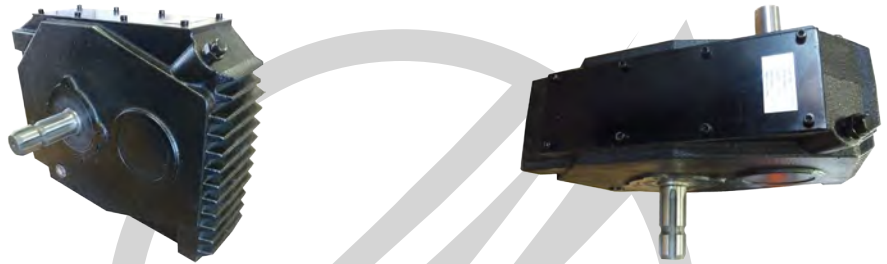

Max H.P.		Input Torque Nm	Ratio	Mounting Holes		Input	Output	Part Number
kW	HP			PCD	Pattern			
47.8	65	862	1:7		272mm x 76mm	1 3/8" x 6	35mm	8300420
58.8	80	1061	1:5		272mm x 76mm	1 3/8" x 6	35mm	8300418
58.8	80	1061	1:6		272mm x 76mm	1 3/8" x 6	35mm	8300419
62.5	85	1127	1:1		272mm x 76mm	1 3/8" x 6	35mm	8300412
62.5	85	1127	1:2.5		272mm x 76mm	1 3/8" x 6	35mm	8300415
62.5	85	1127	1:3		272mm x 76mm	1 3/8" x 6	35mm	8300416
62.5	85	1127	1:3.8		272mm x 76mm	1 3/8" x 6	35mm	8300417
66	90	1193	1:1.48		272mm x 76mm	1 3/8" x 6	35mm	8300413
66	90	1193	1:2		272mm x 76mm	1 3/8" x 6	35mm	8300414

Note: These boxes can be run in reverse to reduce speeds however the rating of the boxes will be greatly reduced.

SLASHER KITS

GEARBOX ♦ PTO SHAFT ♦ CLUTCH ♦ IMPLEMENT GUARD



kW	HP	PTO Shaft Series	Friction Clutch Plates	Gearbox Ratio	Part Number
22	30	T40	2 Plate	1:1.92	T40-0760-SK
45	60	T60	2 Plate	1:1.93	T60-1010-SK
75	100	T80	4 Plate	1:1.83	T80-1010-SK

All Slasher Kits include an Implement Guard

INDENT ITEM ONLY

www.walterscheid.com.au

Document No:	SABRECAT
Issue:	1
Issue Date:	20/04/2019

This catalogue is the copyright of HS Company Pty Ltd